

Provisional Product Data Sheet

Mistron® 200

Typical Properties

Whiteness (Minolta CR300, illuminant D65/2°) Y	86.0
L* (CIE).....	94.34
a* (CIE).....	0.1
b* (CIE).....	2.6
B.E.T.(ISO 9277)	9.2 m ² /g
Density (ISO 787/10).....	2.78 g/cm ³
Tapped bulk density (ISO 787/11).....	0.75 g/cm ³
Loose bulk density (EN 1097/3).....	0.44 g/cm ³
Hardness (Mohs' scale).....	1
pH (ISO 787/9)	9.0
Oil absorption (ISO 787/5).....	30 ml/100g

Mineral Analysis (by thermogravimetric analysis)

Talc.....	95%
Chlorite	4%

Chemical Analysis (by X Ray fluorescence)


SiO ₂	61.0%
MgO.....	30.8%
Al ₂ O ₃	0.9%
Fe ₂ O ₃	0.3%
CaO.....	0.2%
Loss on ignition at 1050°C.....	5.8%
Moisture content at 105°C (ISO 787/2).....	< 0.5%

Screen residue (Alpine airjet) > 63µm 1.5%

Particle Size Distribution by Sedigraph

Sedimentation analysis, Stoke's Law (ISO 13317-3)


Median Diameter: 7.8 µm

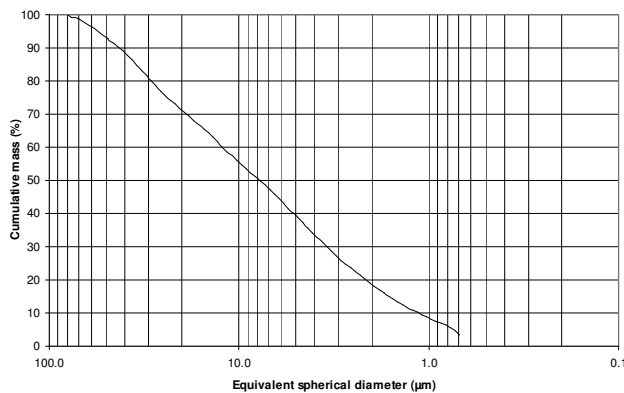

by Laser Mastersizer

Laser diffraction, Mie Theory (ISO 13320-1)

Median Diameter: 10.4 µm

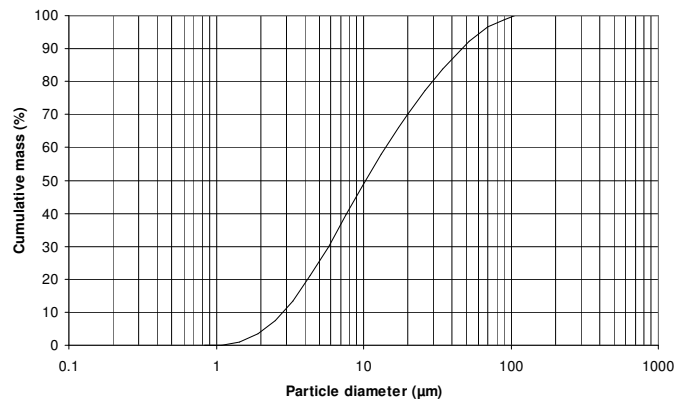

Notice: Although the data listed are typical, they are not production specifications. The supplier provides the data in good faith, however it makes no warranty or representation of any kind, express or implied, regarding the information given or product described, including any warranty of suitability for a particular purpose.

For more information, please visit www.riotintominerals.com

Minerals that make a difference